


The Entra® EXS1610 Shelf is a passive optical network (PON) access line optimal terminal (OLT) that supports the following protocols:

- IEEE 10G-Ethernet PON (10G EPON)
- CableLabs Standard DOCSIS® Provisioning over EPON (DpoE)
- ITU-T XGS-PON



Service providers can shorten time to market and achieve faster time-to-service for fiber broadband services. The EXS1610 All-PON Shelf™, along with the rest of Vecima’s PON portfolio, supports broad fiber deployment use cases, including greenfield projects; hot-spot brownfield rollouts; rural, hybrid fiber-coax (HFC) overbuilds; footprint extensions; and hub collapse projects.

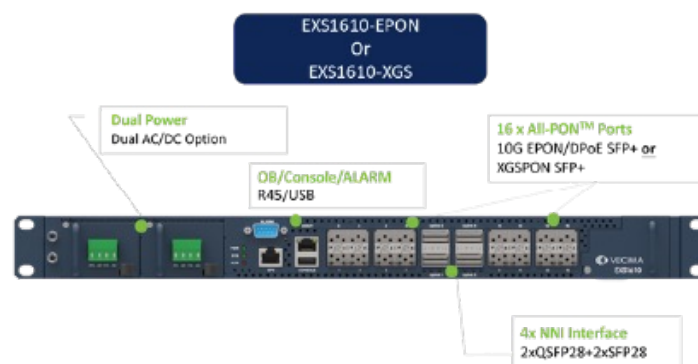

## Highlights

- 16 x PON ports: 10G EPON or XGS-PON
- Uplink optics: 2 x 100/40G and 2 x 25/10G with broad third-party optics to support multivendor ONT/ONU interoperability
- <300mm depth designed for ETSI rack
- 1+1 AC or DC power redundancy
- Temperature-hardened shelf for OSP deployments

**ENTRA<sup>®</sup>**

EXS1610 ALL-PON™ SHELF

## Specifications

### Hardware Specifications

External Interfaces	16 x all-PON ports 2 x 100G/40G QSFP 28 ports 2 x 25G/10G SFP28 ports
Supported PON Technology	ITU-T XGS-PON IEEE GEAPON IEEE 10G EPON

### Power Module

Power Module Slots	Dual redundant
Type	AC/DC dual-power supply
AC Power Input	100 to 240 V AC
DC Power Input	-38.4 to -72 V DC
Power Consumption	290 watts max

### Fan Tray and Module

Dual-redundant power module slots
AC/DC dual-power supply
AC power input: 100 to 240 V AC
DC power input: -38.4 to -72 v DC
Power consumption: 290 watts max

### Physical

Height	1.7 in (44.5 mm)
Width	17.3 in (440 mm)
Depth	10.2 in (260 mm)
Weight	<50 lb (22.7 kg) (Typical Configuration)

### Operating Environment

Temperature	-40 to 65 °C (-40 to 149 °F)
Humidity	10% to 95%, noncondensing

### Certifications

EN 62368-1:2014+A11:2017 IEC 62368-1:2014  
CAN/CSA C22.2 NO. 62368-1-14 ANSI/UL 62368-1, 2ND ED. FCC part 15 Subpart B (Class A) ICES-003 Issue 6  
EN-55032:2015 / AC:2016 EN55024:2010 / A1:2015  
ESTI 300 386 V2.1.1  
AS/NZS CISPR 32:2013  
EN 61000-3 2:2014  
EN 61000-3 3:2013